


SCREEN SIZES:
22" - 75"

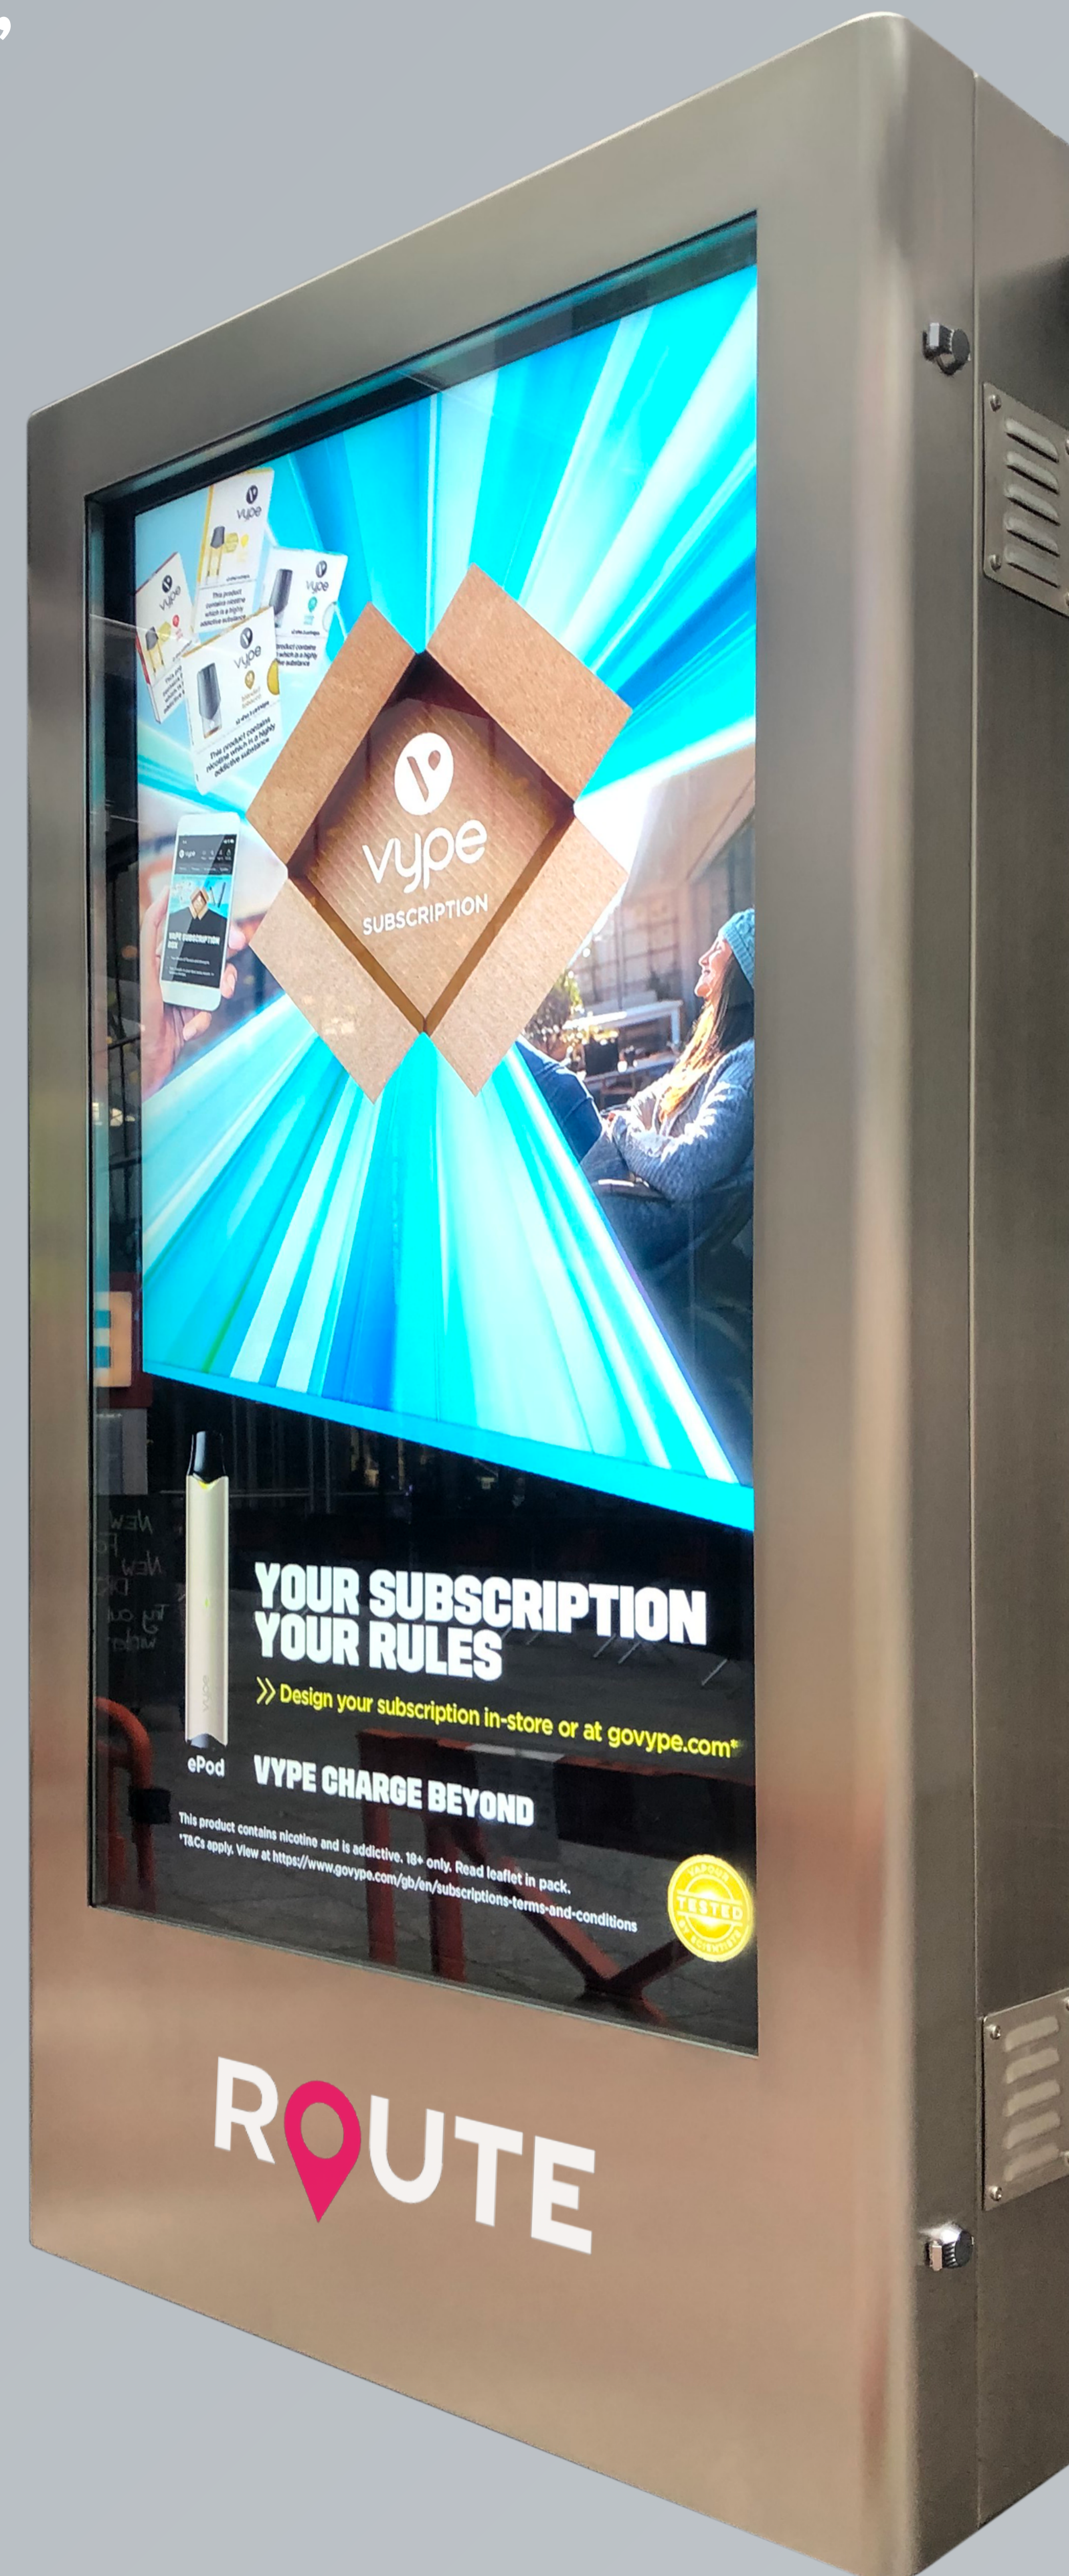

ROUTE

OUTDOOR ENCLOSED SCREEN

IP65 outdoor enclosures, **custom built to fit any screen type or finish**. Custom built to suit any screen type, model or size from 22" - 75", and larger on custom request. With a modular design we can manufacture fully IP65 solutions to suit customers needs & requirements.

STANDARD FINISH 304 STAINLESS STEEL

Built with a premium stainless-steel finish, our outdoor screen enclosures come with a 5 year - Anti-Rust and Corrosion warranty, giving you peace of mind, they will last the test of time.

LCD AIR CURTAIN CROSS BLOWER FAN

Fans & tangential cross blowers provide an LCD air-curtain keeping the hi-bright display nice and cool for the sunniest days.

UV PROTECTED WITH 3M™ SUN CONTROL FILM

Tempered glass is protected with 3M™ sun control film which rejects up to 97% of sun's infrared light and blocks up to 99.9% of harmful ultraviolet (UV) rays. Preventing screen blackening & failure.

FEATURES



3M SUN
CONTROL FILM



AIR-COOLED AND
TEMPERATURE CONTROLLED



24/7 COMMERCIAL
USE



INTERNAL LOCKERS
WITH AV INPUTS


AVAILABLE ADD-ONS



CHOICE OF COMMERCIAL
SCREENS



WINDOWS & ANDROID
MEDIA PLAYER



CUSTOM RAL FINISH
AND BRANDING

 **MADE IN
BRITAIN**

 **3 Years
Warranty**

FEATURES




RCD PROTECTED FOR ELECTRICAL & EQUIPMENT SAFETY

All of our outdoor screen enclosures are fitted with a 30mA RCD that protects users and equipment if an electrical fault was ever to occur. If an electrical fault was detected the switch will disconnect power within 40 nanoseconds.



CUSTOM RAL POWER COAT & FINISH

All of our outdoor screen enclosures are proudly made in Britain, meaning we are able to keep lead times short and offer a bespoke service. We are able to custom fabricate based on requirements and powder coat our enclosures to your brand RAL or finish.

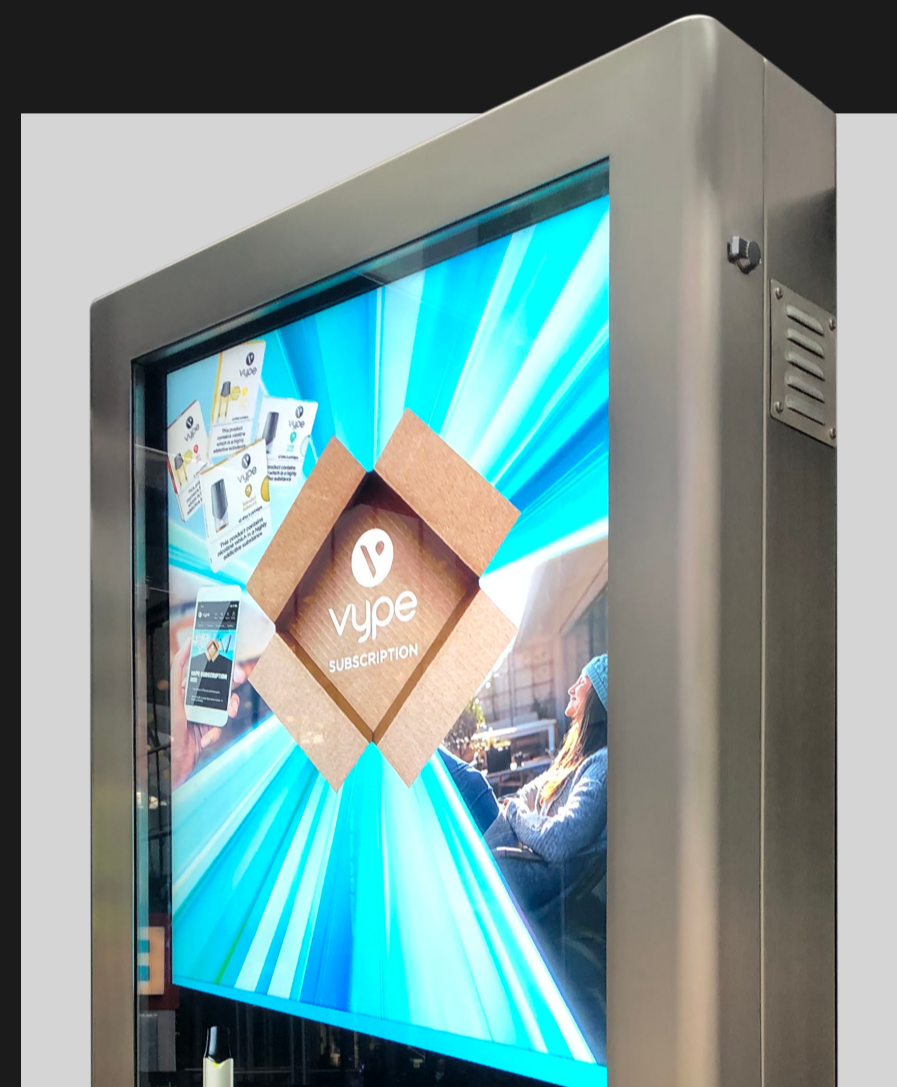

IMPACT RESISTANT & VANDALISM SAFE WITH 6MM TOUGHENED GLASS

Protected by 6mm laminated & toughened glass you can have peace of mind installing our outdoor screen enclosures into public spaces.



SPECIFICATIONS

Panel Details	Size	55"	55"
	Brightness (Cd / M2)	3500	3500
	Panel Type	α-Si TFT-LCD (LG LCD Panel)	α-Si TFT-LCD (LG LCD Panel)
	Resolution	1920 x 1080 (16:9) – FHD	1920 x 1080 (16:9) – FHD
	Contrast Ratio	1200:1	1200:1
	Dynamic Contrast Ratio	250000:1	250000:1
	Panel Life Time (Min.)	50,000 H	50000 H
	Backlight Type	DIRECT TYPE LED	DIRECT TYPE LED
	Response Time (typical)	6 ms	6 ms
	Refresh Rate	120 Hz	120 Hz
AV Inputs	Video	HDMI,VGA, DVI	HDMI,VGA, DVI
Power	Power Consumption (W)	290 W	320 W
	Input Voltage	AC 100–240V, 50–60 Hz	AC 100–240V, 50–60 Hz
Mechanical	Unit Size (HxWxDmm)	1640 x 900 x 236	1890 X 1180 x 286
	Package Size(HxWxDmm)	Pallet Size VERTICAL DELIVERY	Pallet Size VERTICAL DELIVERY
	Net Weight(kg)	37 kg	49kg
	Gross Weight(kg) (with base)	445g	55kg
Environmental	Operating Temperature	0°C ~ 50°C	0°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
	Operating Humidity	-30°C to 60°C	-30°C to 60°C
	Storage Humidity	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI