

SCREEN SIZES:
49" & 55"



ROUTE

OUTDOOR RETAIL TOTEM

Ideal for **town centre advertising displays & wayfinding interactive applications**. Incredibly sleek, stylish and slim yet extremely visible with a choice of sizes; 49" & 55", both with a high bright 3500Nit display. Designed to stand out in busy high street and commercial environments.

304 STAINLESS STEEL BODY & GRAINED FINISH

Custom finish choice of RAL colours or stainless steel. 5 Year – anti-rust and corrosion warranty, giving you peace of mind they will last the test of time.

LCD AIR CURTAIN CROSS BLOWER FAN

Fans & tangential cross blowers provide an LCD air-curtain keeping the hi-bright display nice and cool for the sunniest days.


UV PROTECTED WITH 3M™ SUN CONTROL FILM

Tempered glass is protected with 3M™ sun control film, which rejects up to 97% of sun's infrared light and blocks up to 99.9% of harmful ultraviolet (UV) rays. Preventing screen blackening & failure.


FEATURES



IP65 RATED
ENCLOSURE



AIR COOLED AND
TEMPERATURE CONTROLLED



ULTRA HI-BRIGHT
2500 CD/M² SCREEN



24/7 COMMERCIAL
USE

AVAILABLE ADD-ONS



CAPACITIVE TOUCH
GLASS



WINDOWS & ANDROID
MEDIA PLAYER



3M CONTROL
SUN FILM



CUSTOM RAL PAINTED
FINISH & BRANDING

MADE IN
BRITAIN

3 Years
Warranty

MAIN FEATURES




RCD PROTECTED FOR ELECTRICAL SAFETY

All of our outdoor screen range are fitted with a 30mA RCD that protects users and equipment if an electrical fault was ever to occur. If an electrical fault was detected the switch will disconnect power within 40 nanoseconds.



CUSTOM RAL POWER COAT AND FINISH

All of our outdoor screen enclosures are proudly made in Britain, meaning we are able to keep lead times short and offer a bespoke service. We are able to custom fabricate based on requirements and powder coat our enclosures to your brand RAL or finish.

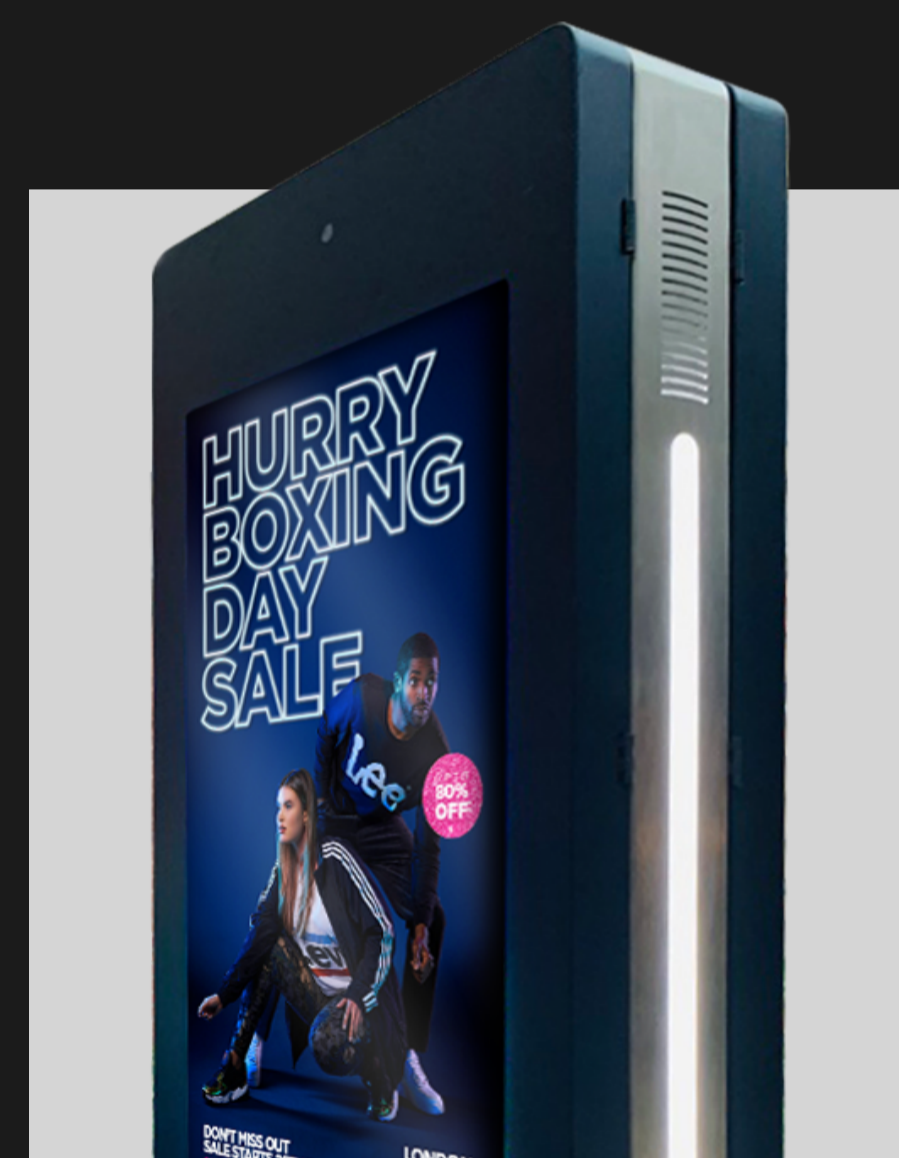

IMPACT RESISTANT & VANDALISM SAFE

Protected by 6mm laminated & toughened glass you can have peace of mind installing our outdoor screen enclosures into public spaces.



3500NIT OEM HIGH BRIGHT PANEL

Our Ultra High Bright OEM Panel boasts an impressive 3500nit brightness that will always be sunlight readable whatever the location. You have peace of mind that the solution will last thanks to the 3 year warranty.



OPTIONAL TOUCH SCREEN - IDEAL FOR WAYFINDING APPLICATIONS

Upgrade the retail totem with 10 Point PCAP touch glass - perfect for city centre & retail park touch applications such as wayfinding or shopping experiences. The foil is applied to the rear of the toughened glass so is vandal resistant and easily cleaned.



FULLY GUARANTEED SOLUTION

Fully backed by a Made In Britain manufacturer you can have peace of mind thanks to a 3 year warranty against mechanical or electrical failure and a further 5 year stainless steel guarantee against rust and corrosion. UK remote technical support packages are also available.

SPECIFICATIONS

	Size	49"	55"
Panel Details	Brightness (Cd / M2)	3500	3500
	Panel Type	α-Si TFT-LCD (LG LCD Panel)	α-Si TFT-LCD (LG LCD Panel)
	Resolution	1920 x 1080 (16:9) – FHD	1920 x 1080 (16:9) – FHD
	Contrast Ratio	1200:1	1200:1
	Dynamic Contrast Ratio	250000:1	250000:1
	Panel Life Time (Min.)	50,000 H	50000 H
	Backlight Type	DIRECT TYPE LED	DIRECT TYPE LED
	Response Time (typical)	6 ms	6 ms
	Refresh Rate	120 Hz	120 Hz
AV Inputs	Video	HDMI,VGA, DVI	HDMI,VGA, DVI
Power	Power Consumption (W)	290 W	320 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Mechanical	Unit Size (HxWxDmm)	1935 x 628 x 37.5 X 404 Base	1907 X 538.5 x 33 x 402 Base
	Package Size(HxWxDmm)	Pallet Size VERTICAL DELIVERY	Pallet Size VERTICAL DELIVERY
	Net Weight(kg)	37 kg	49kg
	Gross Weight(kg) (with base)	445g	55kg
Environmental	Operating Temperature	0°C ~ 50°C	0°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
	Operating Humidity	-30°C to 60°C	-30°C to 60°C
	Storage Humidity	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI